



MERCURY FIBER

Accuracy, productivity and reliability in the metal cutting industry

• **Mercury Fiber** is a laser system specially designed to cut low and medium thickness metal and alloy sheets.

• **Mercury Fiber** is equipped with a high power fiber laser whose beam can be adapted


according to customer's application needs.


• **Mercury Fiber** is equipped with linear motors, that guarantee the most dynamic performances and repeatability in the cutting shapes.

• **Mercury Fiber** is extremely flexible: this system is full of options to meet all customer' needs and fit all production process.

• The operator can access the working area from three sides, ensuring versatility in the process.

• **Mercury Fiber** is a Class 1 laser system: it can be integrated in all shop floors thanks to its hood and suction system, making the environment safe and clean. • Icaro software (CAD/CAM) is user-friendly and allow the operator to import files and set the system in just few steps.



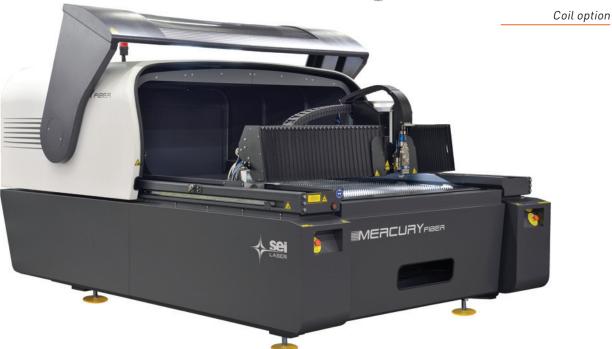





MERCURY FIBER

Main technical features:


Configurations	1208	1215	1520	1530	2040
Working area (mm)	1250 x 800	1250 x 1500	1500 x 2000	1500 x 3080	2000 x 4000
Laser power (W)	1000, 1500, 2000, 3000, 4000				
Repeatability (mm)	< 0.05				
Max. acceleration (m/s²)	up to 20				
Axes resolution (mm)	0.001				
Precision (mm)	+/- 0.05				
Vector files import	.dxf, .plt, .eps, .ai, .pdf, .iso				
Raster files import	.bmp, .jpeg				
Software interface	Icaro CAD/CAM				
Norm compliance	2014/35/UE Low Voltage Directive				
	2006/42/CE Machinery Directive				
	2014/30/UE Electromagnetic Compatibility Directive				
	IEC EN 60825-1 Laser Safety				



Options:

- Motorized waste collector and fully automatic waste separation system;
- CCD Camera for registry process and live view;
- Coil option to automatically load the material and ensure high production yields;
- Unwinder / collecting system;
- Elevator and mobile worktop;
- Sheet locking clamps;
- Rotary piece to handle cylindrical objects;
- Hardening kit;





2150

2150

111111 -----717

1855

L

W

н

1208 1520 1530 2040 1215 2110 3800 4090 5050 5650 2750 2356 2430 2750 3370

2150

2150